
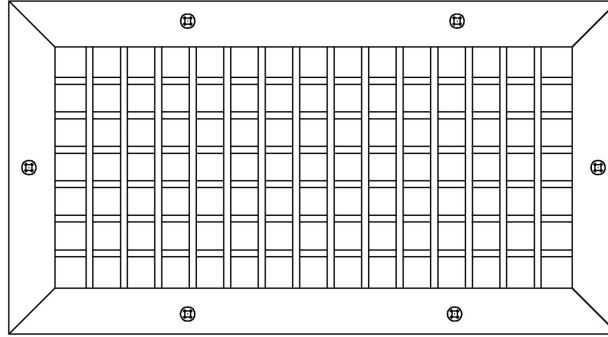


520D Louvered Steel Supply Register – 3/4" Blade Spacing, Double Deflection


Core Style:

Double Deflection

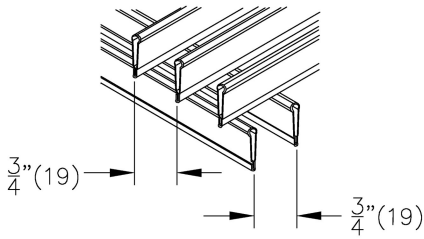


Fastening:

A: Countersunk Screwholes with Screw

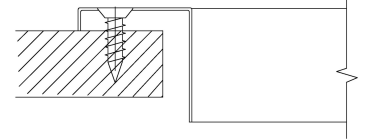

Border: F

1 1/4" (32) Flat Frame

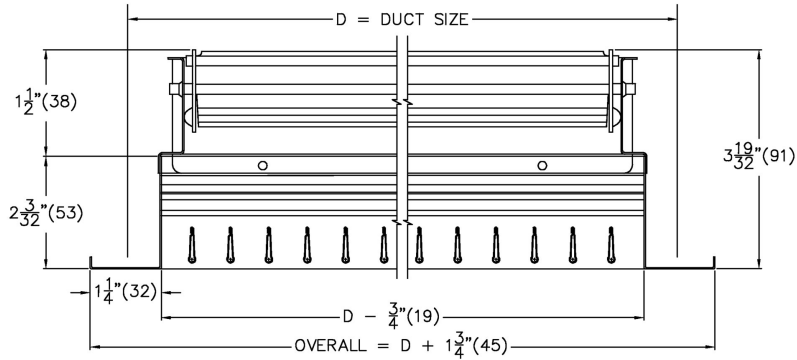

Material:

- Steel

Finish:

- B12 - Standard White

Stock Notes

- Steel construction
- Double deflection – 3/4" spacing
- Opposed blade damper included
- Blades individually adjustable
- Front blades parallel to short dimension
- Price B12 white powder coat finish

		Width												
		6	8	10	12	14	16	18	20	22	24	30	32	36
Height	4	X	180	220	260	300	340	X	430	X	510	X	X	X
	6	210	275	340	410	470	520	590	640	X	750	925	X	1075
	8	X	370	440	530	615	700	780	860	X	1000	1200	X	1425
	10		X	560	660	750	850	940	1040	1150	1220	1500	X	1770
	12			X	790	890	1000	1120	1250	1330	1450	1750	X	2050
	14				X	1020	1150	1300	1440	X	1650	2020	X	2400
	16					X	1300	1450	1660	X	1875	2270	2450	2725
	18						X	1650	1770	X	2100	2520	X	3000
	20							X	1990	X	2300	2800	X	3300
	22								X	2300	X	X	X	X
24									X	2675	3300	3550	3900	

Maximum CFM recommended for NC 30 or less.