



← AIR FLOW

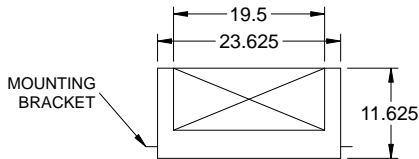

Model: CSP-A700

Inline Cabinet Fan

Standard Construction Features:

- Galvanized steel housing - Sound absorbing insulation - Outlet duct collar with integral spring loaded back draft damper - Forward curved wheel - Plug type disconnect - Adjustable mounting brackets - Square duct connection - Dual galvanized steel scroll design - Field rotatable discharge

Stock Notes

- Units are stocked with 115/60/1 motors
- All CSP fans require 5 watt speed controller, Model CSP-A1050 and CSP-A1401 require 10W speed controller

Available Accessories

- Wall and discharge accessories
- Vibration isolation kit
- Speed control

Dimensional	
Quantity	1
Weight w/o Acc's (lb)	34
Weight w/ Acc's (lb)	34

Motor	
Motor Mounted	Yes
** Input Watts (W)	368
Voltage/Cycle/Phase	115/60/1
Enclosure	ODP

Model	Control Voltage	RPM	Amps*	Max. Input Watts*	CFM / Static Pressure in Inches wg												
					0	0.1	0.125	0.25	0.375	0.5	0.625	0.75	0.875	1.0	1.25	1.5	
CSP-A700		1035	3.16	368	CFM	866	827	817	758	720	694	648	594	419	330		
					Sones	1.1	1.1	1.1	1.1	1.2	1.5	2.0	2.0	2.5	3.0		
					Watts*	367.9	351.0	347.0	330.0	321.8	312.0	298.3	284.1	249.6	231.4		