GREENHECK
Building Value in Air.

TMS JOHNSON
MANUFACTURERS REPRESENTATIVE





Model: SP-A710

Ceiling Exhaust Fan

Standard Construction Features:

- Galvanized steel housing - Sound absorbing insulation - White coated aluminum grille - Outlet duct collar with integral backdraft damper - Forward curved wheel - Plug type disconnect - Adjustable mounting brackets - Square duct connection - Field rotatable discharge

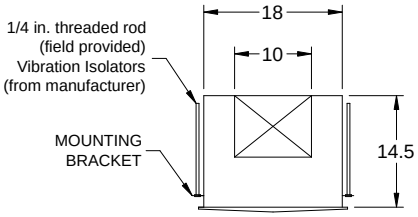



Stock Notes

- Units are stocked with 115/60/1 motors
- Plug-in disconnect switch included
- Integral backdraft damper
- All SP fans require 5W Speed Controller

Available Accessories

- Speed controls
- Wall and discharge accessories

Dimensional	
Quantity	1
Weight w/o Acc's (lb)	32
Weight w/ Acc's (lb)	33

Motor	
Motor Mounted	Yes
** Input Watts (W)	285
Voltage/Cycle/Phase	115/60/1
Enclosure	ODP

Model	ENERGY STAR®	HVI	Continuous Ventilation Compatible	Control Voltage	RPM	Amps*	Max. Input Watts*		CFM / Static Pressure in Inches wg										
									0	0.1	0.125	0.25	0.375	0.5	0.625	0.75	0.875	1.0	1.25
SP-A710					1080	4.40	285	CFM	752	714	701	653	588	486	320				
								Sones	6.0	6.0	6.0	6.0	6.0	5.5	5.5				