



SUBMITTAL DRAWING



TMS Johnson, Inc. | 763-544-5442 | www.tmsj.com
Twin Cities: 2908 Nevada Ave N, New Hope, MN 55427
Rochester: 3270 19th St NW, Suite 210, Rochester, MN 55901

Express Hanger (XP)




Cable hanger for the fast suspension of a variety of services in an indoor stationary setting. Featuring a push-button release fastener for easier height adjustments. NOT suitable for use in chlorinated / swimming pool environments.

FEATURES / BENEFITS


- Up to six times faster to install than traditional methods
- Keyless; no tool required for adjustment
- Ergonomic push buttons allow for rapid height adjustment
- Discreet and aesthetic design
- Supplied as a ready-to-use hanger kit with length of cable and pre-attached end fixing




INSTALLATION & ADJUSTMENT



1.

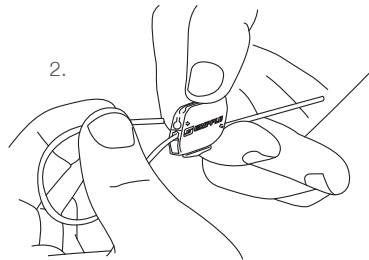


2.

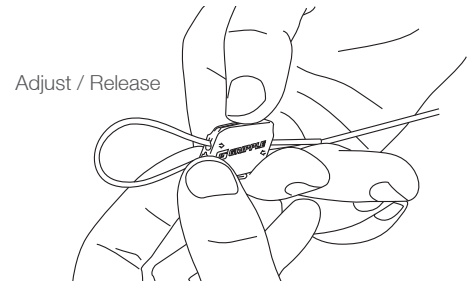

Adjust / Release

Ensure a minimum 3 inches of tail wire exits the fastener.

SIZE SPECS

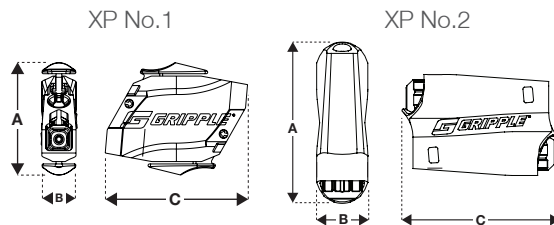

Dimension	XP No.1 (inches)	XP No.2 (inches)
A	0.73	0.84
B	0.23	0.46
C	0.93	1.12

AVAILABLE END FIXINGS



For more options regarding available end fixings please contact us or visit www.gripple.com

CABLE SPECS

Galvanized high tensile steel cable to EN12385. Standard lengths from 5ft-30ft, other lengths can be made to order.

	No.1	No.2
Cable Diameter	1/16"	5/64"
Strand Configuration	7x7	7x7
Min. Breaking Load	125 lbs	500 lbs
Max. Safe Working Load	33 lbs	100 lbs
Tensile Strength (lbs/sq.in.)	256,700	256,700

MATERIAL SPECS

Housing - Type ZA2 Zinc

Wedge - Sintered steel hardened to min. 56 Rockwell C (No.3 - Sintered ceramic roller)

Spring - Stainless Steel (Type 302)

End Cap - UV Stabilized homopolymer polypropylene (No.3 Acetal)

Buttons - Acetal

Safe Working Loads:

XP No.1 - up to 33 lbs @ 5:1 safety factor

XP No.2 - up to 100 lbs @ 5:1 safety factor

PI-EXPRESS-US

www.gripple.com

Gripple's policy is one of continuous development and innovation. We therefore reserve the right to alter specifications, etc. without notice.



Gripple Inc | 1611 Emily Lane | Aurora, IL 60502 | USA

Tel +1 866 474 7753 Fax +1 800 654 0689 Email grippleinc@gripple.com