

## Model: SP-A900

### Ceiling Exhaust Fan

#### Standard Construction Features:



- Galvanized steel housing - Sound absorbing insulation - White coated aluminum grille - Outlet duct collar with integral spring loaded backdraft damper - Dual forward curved wheels - Plug type disconnect - Adjustable mounting brackets - Square duct connection - Dual galvanized steel scroll design - Field rotatable discharge

#### Stock Notes

- Units are stocked with 115/60/1 motors
- Plug-in disconnect switch included
- Integral backdraft damper
- All SP fans require 5W Speed Controller

#### Available Accessories

- Speed controls
- Wall and discharge accessories

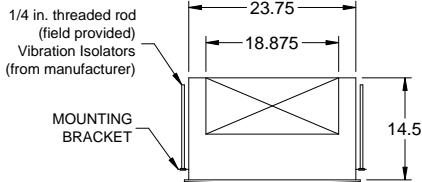

Dimensional	
Quantity	1
Weight w/o Acc's (lb)	56
Weight w/ Acc's (lb)	57

Motor	
Motor Mounted	Yes
** Input Watts (W)	301
Voltage/Cycle/Phase	115/60/1
Enclosure	ODP

Model	ENERGY STAR®	HVI	Continuous Ventilation Compatible	Control Voltage	RPM	Amps*	Max. Input Watts*	CFM / Static Pressure in Inches wg											
								0	0.1	0.125	0.25	0.375	0.5	0.625	0.75	0.875	1.0	1.25	
SP-A900					1055	2.78	301	CFM	971	925	915	866	814	754	694	621	433	327	
								Sones	6.0	5.5	5.0	5.0	5.0	5.0	5.5	5.5	6.0	6.5	